digital illustrate inc.

NEOTITAN

Model : FB2513-06DW

NEW

- Dedicated true flatbed for all kinds of rigid and sheet materials
- 6 Colors(C, M, Y, K, Lc, Lm) + White
- Simultaneous Printing Mode : Color + White / White + Color
- Max Printing Speed : 30sqm/hr(Production Mode)

UV Ink

Dilli Original UV Ink

DKT-200 : Rigid(CMYKLmLc+W)

DKT-210 : Flexible(CMYKLmLc+W)

720 X 1440 dpi(max)

High resolution to express photorealistic images for graphic and signage applications

DPCM System

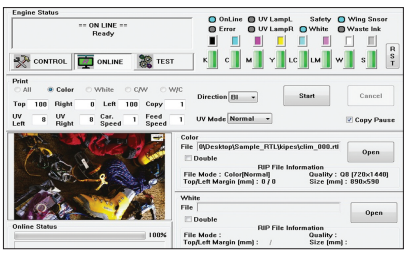

By utilizing Dilli's ICC color profile with full color gamut, the best printed image quality is realized

Lamp Power Control System

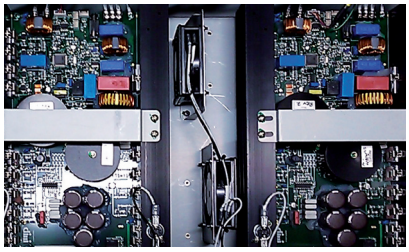

Depending on substrate, appropriate UV lamp power can be selected to guarantee the most optimal curing condition

Auto Vacuum Control System

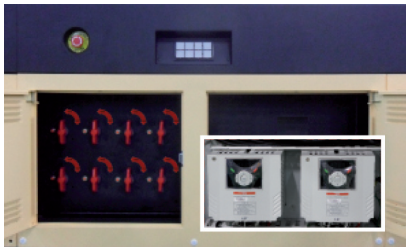

Maintains uniform vacuum strength to a preset level with a PID feedback system which allows secure placement of media regardless of its size